

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	900
Width (mm)	110
Height (mm)	60
Size	900x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	7
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-


Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Timberlook
Colours	Weathered Ash, The Rocks, Grey Smooth, Gumtree Timberlook, Merbau Timberlook & Ironbark Timberlook
Product Code	
Format	Concrete Sleeper
Place of Manufacture	-
Length (mm)	1500
Width (mm)	50
Height (mm)	150
Size	1500x50x150
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f 'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	31
Units Per Tonne	19.607843137255
Units Per Pallet	-
Units per Square Metre	3.16
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	no

Diagram

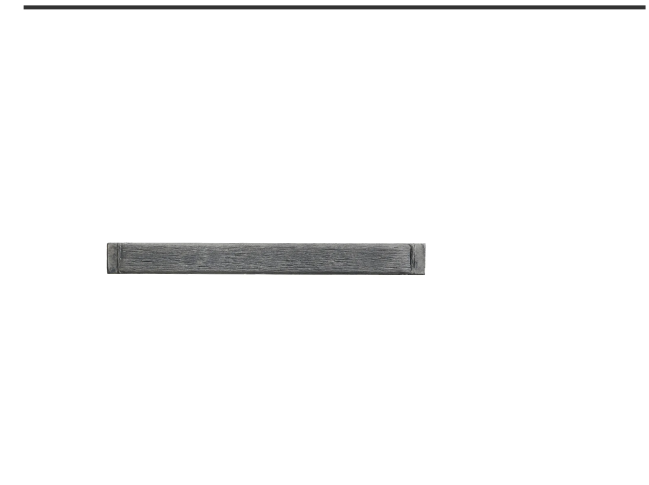

Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

-

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1200
Width (mm)	110
Height (mm)	60
Size	1200x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	10
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1200
Width (mm)	110
Height (mm)	60
Size	1200x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	10
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	900
Width (mm)	60
Height (mm)	60
Size	900x60x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	4
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	650
Width (mm)	110
Height (mm)	60
Size	650x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	5.02
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1500
Width (mm)	60
Height (mm)	60
Size	1500x60x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	6
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	900
Width (mm)	110
Height (mm)	60
Size	900x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	7
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1500
Width (mm)	110
Height (mm)	60
Size	1500x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	12
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1200
Width (mm)	60
Height (mm)	60
Size	1200x60x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	5
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Sandstone
Colours	Graphite Sandstone &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	Yatala, Queensland
Length (mm)	1500
Width (mm)	50
Height (mm)	150
Size	1500x50x150
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	30
Units Per Tonne	33.3333333333333
Units Per Pallet	42
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1800
Width (mm)	60
Height (mm)	60
Size	1800x60x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	7
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1500
Width (mm)	110
Height (mm)	60
Size	1500x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	12
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	650
Width (mm)	60
Height (mm)	60
Size	650x60x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	3
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram

Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	650
Width (mm)	110
Height (mm)	60
Size	650x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	5.02
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1800
Width (mm)	110
Height (mm)	60
Size	1800x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	14
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Fence Bracket
Place of Manufacture	-
Length (mm)	580
Width (mm)	50
Height (mm)	3
Size	580x50x3
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	1
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification

Product Details

Product Range	Ridgi
Texture Finish	Galvanised
Colours	Galvanised Grey &
Product Code	
Format	Concrete Sleeper Post
Place of Manufacture	-
Length (mm)	1800
Width (mm)	110
Height (mm)	60
Size	1800x110x60
Core Volume (%)	-
Characteristic Unconfined Compressive Strength (f'uc) MPa	-
Minimum Shell Thickness (mm)	-
Weight	14
Units Per Tonne	-
Units Per Pallet	-
Units per Square Metre	-
Durability Class	General Purpose
Slip Resistance	
Wall Mass Inc Hollow	-
Solar Absorption Rating	-
LRV	-
FRL	-
EPD	Yes
Declare	No
Recycled Content %	-

Diagram



Fire Resistance Levels^

Structural Adequacy	-
Integrity	-
Insulation	-

Notes

This data represents average results from production lots based on the results achieved by samples selected at random for testing. Figures are accurate at date of publication and subject to change without notice. Contact UrbanStone for confirmation of product specification